


PDQ SCISSORS LIFT


The PDQ is a low profile, portable dock lift for medium loads. It is designed for high volume applications especially in areas where no dock exists.

Portable: for medium to heavy loads; for loads up to 6,000 lbs. raised height to 60". Easily moved by one person.

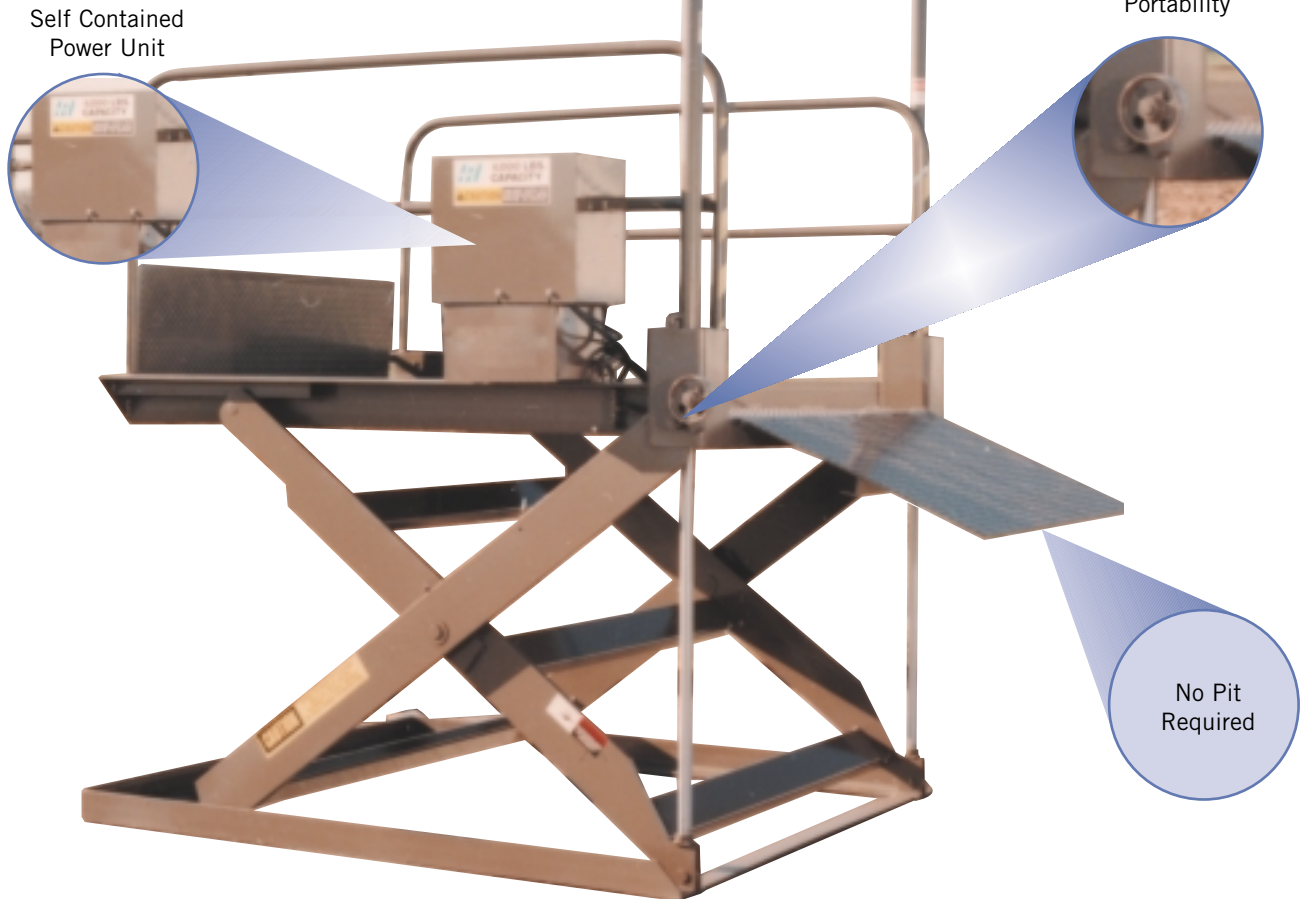

TYPICAL MARKETS

Automotive | Retail Outlet | Grocery

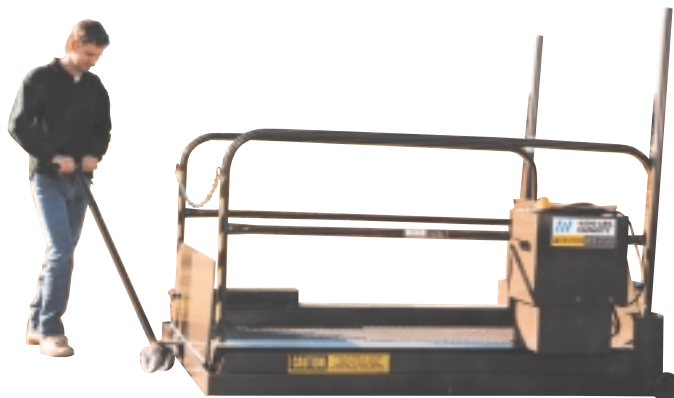

KEY FEATURES

- Lubricated-for-life composite bearings on all pivot points
- Solid steel legs
- Platform surface constructed of 4-way tread plate
- Turned, ground, polished and hard-chromed axle pins
- Double-wire braided hydraulic hoses
- Velocity fuses on cylinders
- Internally mounted 5 hp super torque motor
- Prewired UL labeled and approved control components
- Factory tested to 110% of capacity
- Chrome-plated cylinder rods
- Flip down wheels for transporting unit, portability
- 30" x 58" hinged approach ramp
- 18" x 58" hinged (semi-automatic) throwover bridge
- Permanent 48" high handrails
- Built and designed in accordance with ANSI MH29.1



BENEFITS

- Maintenance free bearings, no greasing
- Minimal platform deflection in lowered position
- Extended bearing life
- Extended hose life for added safety
- High efficiency motor provides faster raising times
- Easy servicing of hydraulic valve components
- Easy access to hydraulic/electrical components for servicing
- Free fall arrested in case of severed hose-Safety First!
- Easy to relocate to different dock or facility

POWER SUPPLY

- The standard 5 hp electric motor is 230VAC, 60 cycle, 3 phase

WARRANTY

- Labor: 1 year, Electrical: 1 year, Hydraulic Components: 1 year
Mechanical Components: 1 year

PDQ SCISSORS LIFT

SPECIFICATIONS: Capacities – 4,000 to 6,000 lbs. - Raised Height To 60"

Travel (inches)	Capacity (pounds)	Base Frame Size (inches)	Platform Sizes (inches)	Axle Load Capacity Over Bridge End (pounds)	Axle Load Capacity Opposite Bridge End (pounds)	Lowered Height (inches)	Nom. Std. Speed (FPM)	Std. Motor HP (230/60/3)	No. of Rams	Shipping Weight (pounds)	Model
55 ½	4,000	76 x 84	60 x 84	2,000	2,000	4 ½	15	5	2	2,700	PDQ 40
55 ½	5,000	76 x 84	60 x 84	3,000	3,000	4 ½	15	5	2	2,800	PDQ 50
55 ½	6,000	76 x 84	60 x 84	3,000	3,000	4 ½	15	5	2	2,900	PDQ 60